VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)

The VBOX 3i RTK, RACELOGIC's most powerful GPS data logging system, is an RTK enabled version of the VBOX 3i Dual Antenna which can be used in conjunction with an RTK differential Base Station to obtain ±2cm positional accuracy.

VBOX 3i RTK (VB3iSLR) combines high level accuracy and test repeatability with the ability to measure slip and pitch/roll angles at 100Hz. It's capability of detecting signals from both GLONASS and GPS satellites, makes the 2cm RTK lock robust, resilient and quicker to access.

VBOX 3i RTK is compatible with all existing peripherals including Multifunction Display, 16bit Analogue Input, 4 Channel Frequency and Pulse Counter Input Module, 8 Channel Thermocouple Interface and Yaw rate sensor.

In conjunction with an RTK DGPS Base Station, VBOX 3i RTK can be used in any number of vehicle tests where positional accuracy and repeatability are of the utmost importance, including ADAS tests like Adaptive cruise control, Auto parking systems development, Blind spot detection, Collision/pedestrian mitigation and Lane departure warning.

VBOX 3i RTK comes with a VBOX Manager, a display enabling you to change the dynamic modes and filter settings, set up slip angle data and define antenna locations.

A Dual Antenna Mounting Pole (needs to be ordered separately) ensures optimum antenna separation and the most accurate attitude measurement.

Features

- Better than 2cm positional accuracy with an RTK Base Station, ± 5cm vehicle separation accuracy when used in a Moving Base setup
- Resilient RTK lock using GPS + GLONASS satellites
- Measures slip angle, pitch (or roll) angle and yaw rate at 100Hz
- Very low latency
- 4 x 24bit differential analogue input channels with ±50v input range and synchronous capture
- Oversampled brake/event trigger input (25nS)
- RS232 serial, USB & Bluetooth Interface
- Audio voice tagging (microphone included)
- Data logged to compact flash memory card
- 2 x 16bit User configurable analogue outputs
- 2 x Digital outputs
- User configurable logging conditions
- Logging rate selectable to 100Hz, 50Hz, 20Hz, 10Hz, 5Hz, 1Hz
- Wide 7V to 30V operating range
- Low current consumption
- 2 x CAN Bus interface for data input & output

VBOX AUTOMOTIVE
Unit 10, Swan Business Centre, Osier Way, Buckingham, Bucks MK18 1TB, England
Tel: +44 (0)1280 823 803 Fax: +44 (0)1280 823 595 Email: vbox@racelogic.co.uk
www.vboxautomotive.co.uk

VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)

System

100Hz GPS Engine

VB3iSLR features a powerful GPS engine embracing twin antennas capable of providing 100Hz signal update rate for all GPS / GLONASS parameters (i.e. velocity, heading & position). Velocity and heading are calculated via Doppler Shift in the GPS carrier signal, providing you with unparalleled data accuracy. In addition to GPS, the VB3iSL tracks the Russian GLONASS range of satellites. The advantage of using both satellite constellations is that there are almost twice as many satellites in view: this helps to maintain a robust satellite lock in areas where 'GPS only' reception can cause data interruption.

Dual Antenna

Utilising two GPS antennas additional parameters can be measured. Slip and pitch/roll angles can now be more accurately defined, making this system ideal for vehicle dynamics testing.

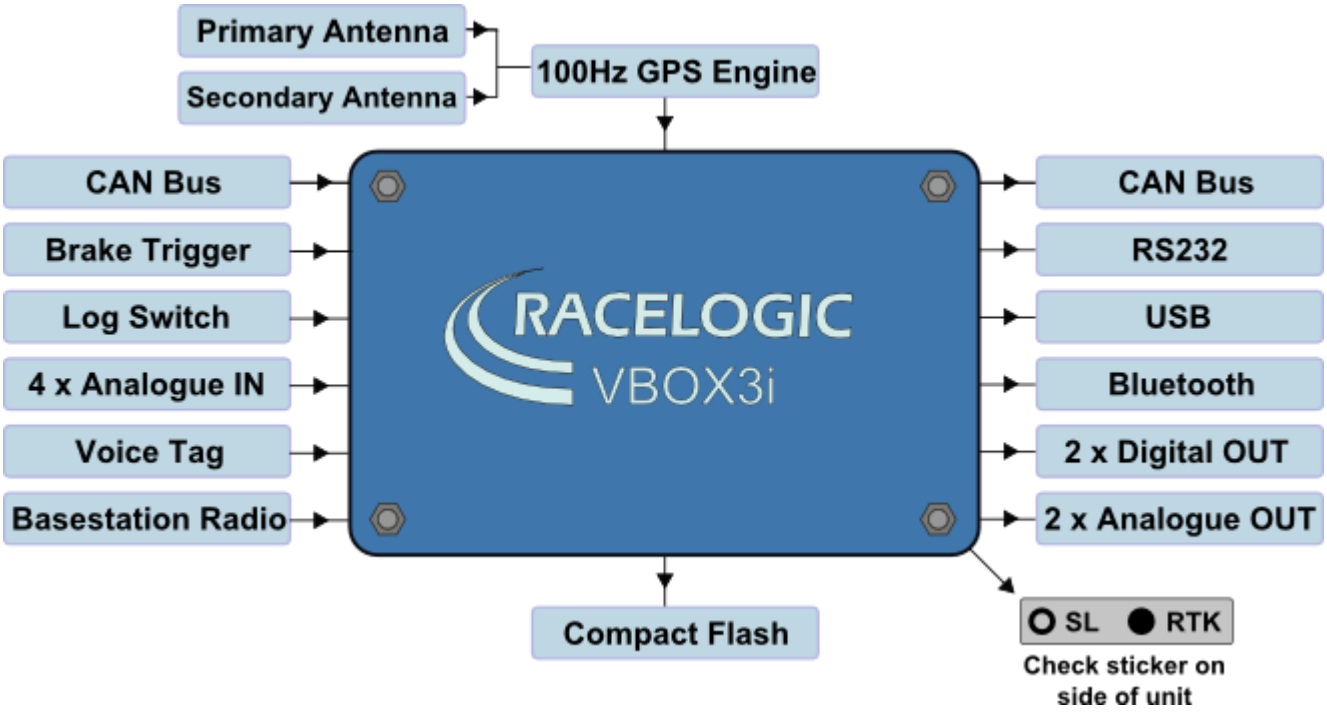

Note: On a VBOX 3i RTK the 'SL' and the 'RTK' features are ticked on the silver serial label. All units with the 'IMU04 ready' sticker can be used for GPS/INS integration using the IMU04.

Compact Flash

VB3iSLR can accept Type I compact flash cards to log data. Data is stored in a standard PC format allowing fast transfer of data to a PC equipped with a compact flash card reader. The file format is an ASCII text file that can be loaded directly into VBOX Tools software, or imported into Excel and other third party software.

VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)

Inputs / Outputs

Inputs	Outputs
CAN Bus Two CAN Bus interfaces are available on VB3iSLR. By utilising separate CAN Bus connections it allows data to be logged from external modules (e.g. TC8, FIM02). Up to 16 CAN signals can also be logged from a different CAN source (e.g. Vehicle CAN Bus). When logging data from another source, VBOX Tools can load signal data from an industry standard CAN database file (.DBC).	**CAN Bus** One of the two VBOX CAN ports can be used to output VBOX GPS parameters plus any 12 channels from connected input modules or internal AD channels. The baud rate and CAN id's for these outputs are user configurable.
Brake Trigger By using a physical pressure switch on the brake pedal, a precise 'start of braking event' can be captured.	**RS232** RS232 connector is used for VBOX configuration and output of real-time GPS data. Serial data sent to the software is limited by the bandwidth of the PC serial port - 20Hz (Full 100hz serial is available via USB / Bluetooth).
Log Switch A start/stop logging switch allows users to manually choose when they wish to record data.	**USB** VB3iSLR USB connector can be used for VBOX Configuration to output real-time data at 100Hz.
4x Analogue Input Each of the four Analogue Input channels on a VB3iSLR has a dedicated 24bit analogue converter. Data is recorded from each channel simultaneously to avoid latency between analogue channel data. The name, scale and offset of each Analogue Input channel can be adjusted using VBOX Tools software to allow sensor calibration and therefore logging of data in standard SI units. The Analogue Input connector also provides two power outputs that may be used for driving sensors. These are in the form of a 5v DC isolated supply and an output equal to the VBOX power supply voltage.	**2x Analogue Outputs** 2x 16bit analogue outputs can be configured to output velocity (or other GPS parameters) for use by additional data logging equipment. The voltage output range is from 0 to 5v DC with a resolution of 76 µV per bit. **2x Digital Outputs** Two digital outputs are available. One Digital output is assigned to Speed/Distance – configurable via Pulses per Meter. While the second is a level switch output enabling users to select any one of the logged channels and assign it a threshold value.
Voice Tagging VB3iSLR can record a GPS synchronised WAV audio tag up to 30 seconds long to a time accuracy of 0.5 sec. The recorded WAV file is then logged to the CF card.	**Bluetooth** VB3iSLR comes equipped with an internal Bluetooth Radio allowing remote configuration and remote output of real-time GPS data to any Bluetooth capable PC or Data logger. The Bluetooth connection is capable of sending data at the full 100Hz rate.
Power Supply VB3iSLR can accept a supply voltage between 7 to 30V DC. Low current consumption results in extended battery life.	

VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)

GPS Specifications

Velocity		Distance	
Accuracy	0.1 Km/h (averaged over 4 samples)	**Accuracy**	0.05 % (<50cm per Km)
Units	Km/h or Mph	**Units**	Metres / Feet
Update rate	100 Hz	**Update rate**	100 Hz
Maximum velocity	1000 Mph	**Resolution**	1 cm
Minimum velocity	0.1 Km/h		
Resolution	0.01 Km/h		
Latency	8.5 ms ±1 or 15.5 ms ***		

Absolute Positioning		Time	
Accuracy	2m 95% CEP*	***Accel/Brake Test (MFD/VBOX Tools)***	
Accuracy (SBAS DGPS)	<1m 95% CEP*	**Resolution**	0.01 s
Accuracy (EGNOS DGPS)	70cm 95% CEP*	**Accuracy**	0.01 s
Accuracy (WAAS DGPS)	1.5m*** 95% CEP*	***Lap Timing (OLED/VBOX Tools)***	
Accuracy (RTCM DGPS)	40cm*** 95% CEP*	**Resolution**	0.01 s
Accuracy (RTK DGPS)	2cm 95% CEP*	**Accuracy**	0.01 s**
Update rate	100 Hz		
Resolution	1.8 mm		
Height accuracy	6 Metres 95% CEP*		
Height accuracy with DGPS	2 metres 95% CEP*		
Height Accuracy with RTK DGPS	2cm 95% CEP*		

*** To be confirmed

Acceleration		Environmental and physical	
Accuracy	0.50%	**Weight**	Approx. 900 grams
Maximum	20 G	**Size**	170 x 121 x 41mm
Resolution	0.01 G	**Operating temperature**	-20°C to +70°C
Update rate	100 Hz	**Storage temperature**	-30°C to +80°C

Heading		Brake stop accuracy	
Resolution	0.01°	**Accuracy**	+/- 2cm
Accuracy	0.1°		

Memory		Power	
Compact Flash	Type I	**Input Voltage Range**	7 – 30V DC
Recording time	Dependent on flash card capacity****	**Power**	Max. 5.5 Watts

* 95% CEP (Circle of Error Probable) means 95% of the time the position readings will fall within a circle of the stated Radius. 2cm accuracy requires an RTK option and RTK enabled Base Station
** Not using DGPS and crossing the start/finish line at 100km/h
*** With fixed CAN latency.
**** Approximately 29Mb per hour used when logging GPS data at 100Hz; Approx. 182Mb per hour total logging capacity.

VBOX AUTOMOTIVE
Unit 10, Swan Business Centre, Osier Way, Buckingham, Bucks MK18 1TB, England
Tel: +44 (0)1280 823 803 Fax: +44 (0)1280 823 595 Email: vbox@racelogic.co.uk
www.vboxautomotive.co.uk

VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)

Slip, Pitch, Roll Angle Accuracies

Antenna Separation	Slip Angle (RMS)	Pitch / Roll Angle (RMS)
0.5m	<0.2°	<0.14°
1.0m	<0.1°	<0.07°
1.5m	<0.067°	<0.047°
2.0m	<0.05°	<0.035°
2.5m	<0.04°	<0.028°

Outputs

CAN Bus	
Bit rate	125Kbits, 250Kbits ,500Kbits & 1Mbit selectable baud rate
Identifier type	Standard 11bit 2.0A
Data available	Satellites in View, Latitude, Longitude, Velocity, Heading, Altitude, Vertical Velocity, Distance, Longitudinal Acceleration & Lateral Acceleration, Distance from Trigger, Trigger, Time, Trigger Velocity

Analogue		Digital	
Voltage range	0 - 5V DC	**Frequency range**	DC to 44.4Khz
Default setting (The range settings can be adjusted by the user in VBOX Tools Software.)	Velocity 0.0125Volts per Km/h (0 to 400Km/h)	**Default setting** (The range settings can be adjusted by the user in VBOX Tools Software.)	Velocity 25Hz per Km/h (0 to 400Km/h) 90 pulses per metre
Accuracy	0.1 Km/h	**Accuracy**	0.1Km/h
Update rate	100Hz	**Update rate**	100Hz

Inputs

CAN Bus	
RACELOGIC modules	Up to 32 channels from any combination of ADC02, ADC03, FIM02, TC8, YAW03 or CAN01
External CAN Bus	16 Channels of user definable CAN signal from external bus, e.g. Vehicle CAN bus Can load signal data from industry standard DBC database file

Analogue		Digital	
Number of channels	4	**Brake event trigger**	25ns resolution
Input range	±50v	**On/Off logging control**	Remote log control from hand-held switch
Channel sample order	Synchronous		
Resolution	24 bit		
DC accuracy	+/- 1mV		

VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)

Hardware & Software Support

Support	
Hardware	One Year Support Contract
Software	Lifetime Support Contract: Valid for a minimum of 5 years from the date of purchase and limited to the original purchaser. Contract includes: telephone/ email technical support provided by local VBOX Distributor and firmware/ software upgrades (where applicable).

Package Contents

Description	Product Code
1x VBOX 3i SL unit	VB3iSL-V4
1x VBOX Manager	VBFMAN
1x VBOX Mains Charger	RLVBACS020
2x GPS/GLONASS Ground Plane Antenna with 4m removable cable	RLACS156
1x 4GB Compact Flash Card	RLACS098
1x VBOX Serial PC cable (5-way LEMO to 9-way D-type serial cable - 2m)	RLCAB001
1x VBOX 3i Bluetooth antenna	RLACS119
1x VBOX 3i Audio Headset	RLACS120
1x 25-way D-type connector	ADC25IPCON
1x USB ‘A’ to Mini ‘B’ 2m cable (USB Configuration)	RLCAB066-2
1x 2-way LEMO power lead to 12V cigar lighter – 2m	RLCAB010L
2x spare fuse 3.15A 250V	416-610
1x USB multi card reader	RLACS163
1x 5-Way Lemo to 5-Way Lemo cable – 2m	RLCAB005-C
1x VBOX User Manual	VB3iMAN
1x VBOX Tools Software Manual	VBTOOLSMANA5
1x VBOX Tools Software CD	RLVBACS030
1x VBOX Tape Measure	RLACS091
1x Spare Antenna Cable	RLCAB071-4
1x VBOX Padded carry case	RLVBACS013

Optional: RTK Base Station (RLVBBS4RG) / Twin Antenna Roof Mounting Pole (RLACS171)